

MUC-5095

Intel® Jasper Lake Processor based Compact Mini PC
with Dual Displays



Features

- CPU: Intel® Celeron® Processor N5095/N5095A/N5105
- Memory: Dual Channel DDR4 for Memory up to 32GB
- Display: Intel® Integrated Graphics, Dual Displays via 2xHDMI2.0
- I/O Ports: 2xUSB3.2, 2xUSB2.0, 1xLAN, USB-C, Line-out, Mic-in
- Expansion: M.2 for WiFi and Bluetooth
- Storage: M.2 for 2280 NVMe/SATA SSD
- Power: 12V DC-in



IoT Solutions
Alliance

**Industrial Solution
Builders Specialist**

Maxtang®

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The Maxtang MUC-5095 mini-PC incorporates the Intel® Jasper Lake N5095/N5095A/N5105 processor, providing increased computing power at a competitive cost. It supports up to 32GB of dual-channel SO-DIMM DDR4 memory and offers dual independent displays via 2xHDMI2.0 ports. Additionally, it includes 1xM.2 SATA/NVMe slots for flexible storage options. The comprehensive connectivity options comprise 2x USB3.2, 2xUSB2.0, 1xLAN, 1x USB-C, Mic-in, and Line-out, all powered by a standard 12V DC-in.

The MUC-5095 is desktop-ready and easy to set up. It allows customization for RAM, storage, and bare-bones configurations to meet specific user requirements. With compact dimensions of 128.7mm x 128.7mm x 41.5mm and a lightweight, space-saving design, it is well-suited for diverse applications such as kiosks, PoS systems, retail, home, or office environments.





H/W Monitor



Watchdog



I/O Interfaces

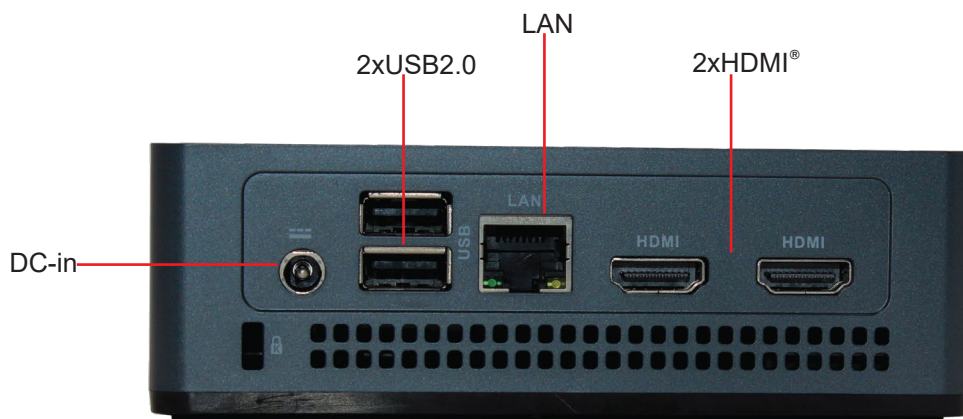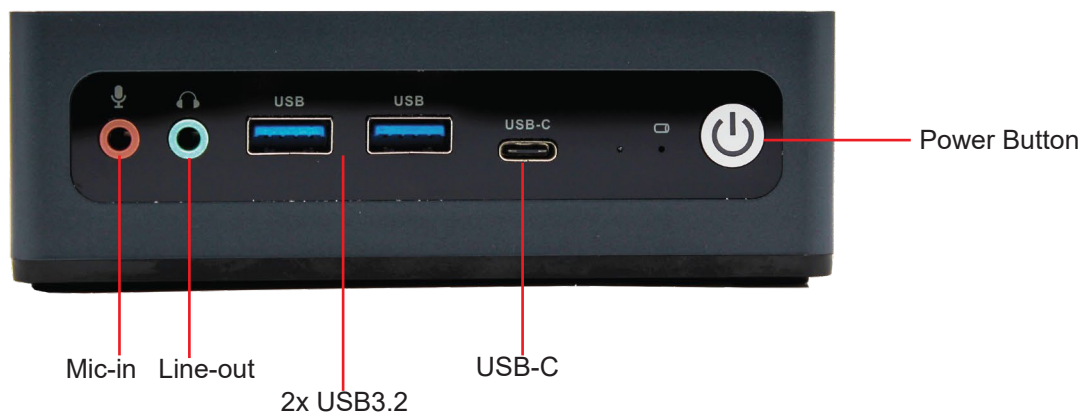

Wi-Fi




Bluetooth

Technical Specifications

Processor	CPU	N5095/N5095A/N5105
	#of Cores/Threads	4Cores/4Threads
	Burst Frequency	2.90GHz
	Base Frequency	2.00GHz
	Cache	4MB L3 Cache
	BIOS	AMI UEFI BIOS
Memory	Type	Dual Channel SO-DIMM DDR4
	Max Capacity	32GB
Display	GPU	Integrated Intel® UHD Graphics
	Display Port	2x HDMI 2.0
Ethernet	Speed	10/100/1000 Mbps
	Controller	RTL8111H
	Interface	RJ-45
Audio	Audio Codec	Realtek HD
	Interface	Line-out, Mic-in, supports audio header and amplifier header
Hardware		CPU temperature, system temperature, onboard voltage, watchdog
Storage	M.2	1xM.2 for 2280 NVMe/SATA SSD
Expansion	M.2	1xM.2 for WiFi and Bluetooth
I/O Interface	HDMI®	2
	USB2.0	2
	USB3.2	2
	USB-C	1
	LAN	1
	Audio	1 x Line-out + 1 x Mic-in
	DC-in	1
	Dimension	Size
Power	Standard Port	12V DC-in
Temperature	Operating Temp.	0°C to 50°C
	Storage Temp.	-20°C to 70°C
Cooling		Active
Operating System		Win10/11 64bit, Linux 64bit

*All specifications and photos are subject to change without notice.

Dimension

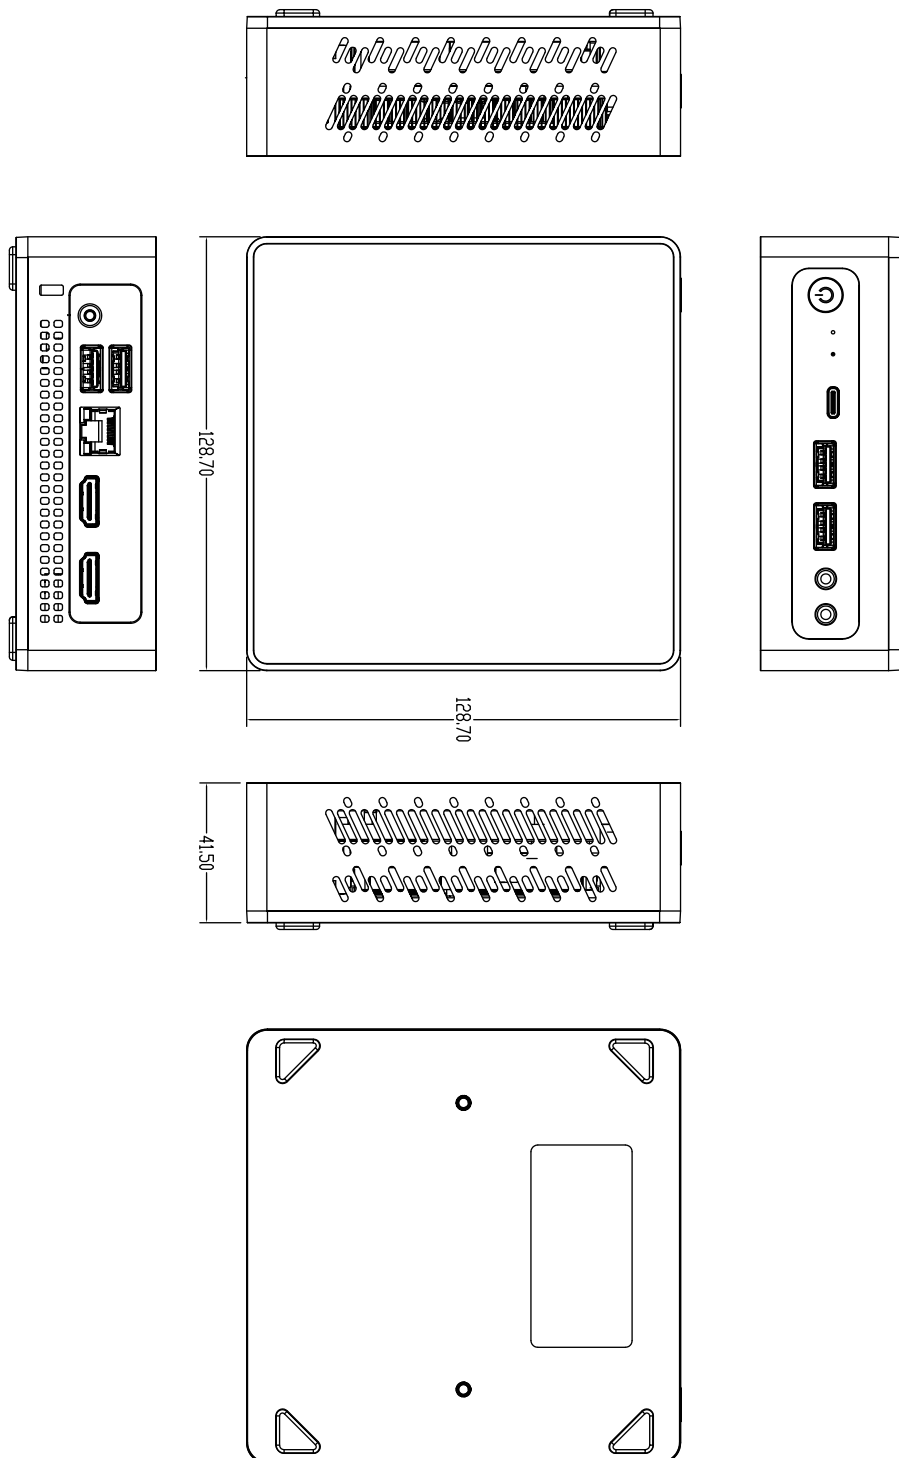

Copyright ©2022 Maxtang Technology Co. Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.